




CIRRUS

Fiche technique / Notice de montage

Assembly Notice

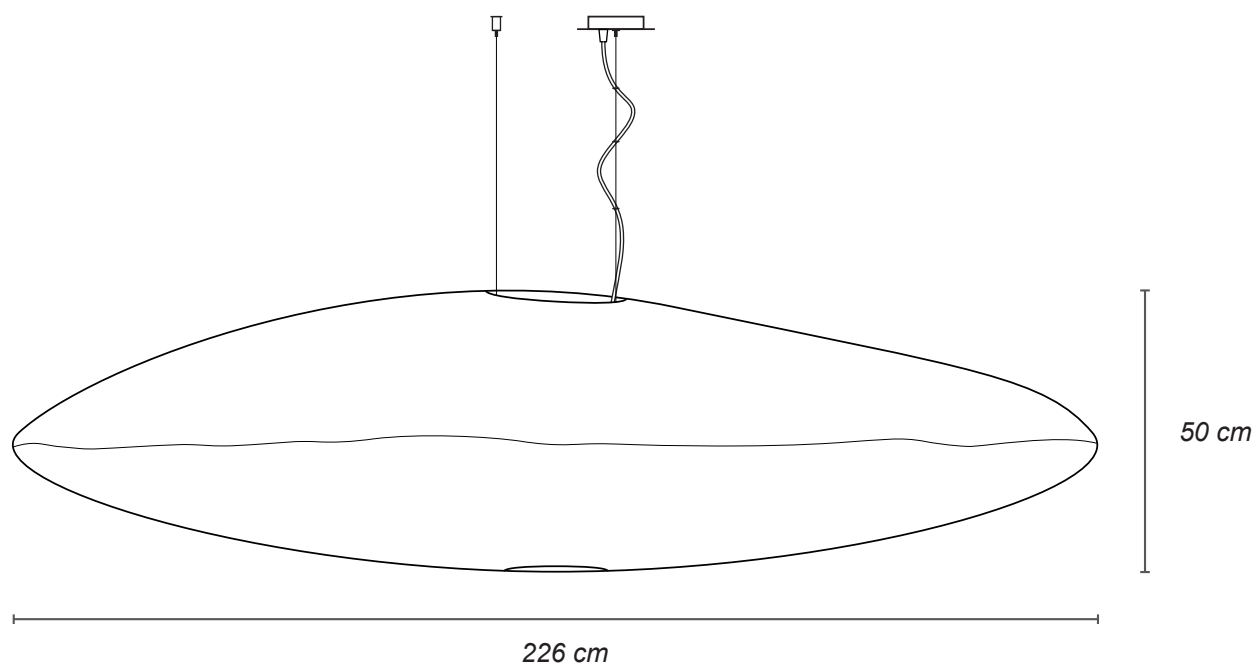

CIRRUS - SUSPENSION

Dimensions : 226 x 80 x 50 cm

- 4 lampes LED type E27 - 1060 Lumen - 2700 Kelvin
- Puissance max : 12 W - Tension : 230 V

- Matières : Papier japonais, rotin, structure acier.

- Entretien : Épousseter régulièrement avec un plumeau naturel ou une Micro fibre.

NOTE: POUR CHANGER L'AMPOULE, TENIR LA DOUILLE D'UNE MAIN ET CHANGER L'AMPOULE AVEC L'AUTRE MAIN. ATTENTION RISQUE DE BRÛLURE SI L'AMPOULE EST CHAUDE.

ATTENTION: NE PAS STOCKER LA LAMPE POSEE A PLAT SUR LE SOL, TOUJOURS LA POSITIONNER SUR LA TRANCHE. SI POSSIBLE LA CONSERVER DANS L'EMBALLAGE D'ORIGINE JUSQU'A SA MISE EN PLACE.

CIRRUS - HANGING LAMP

Size : 226 x 80 x 50 cm

- 4 lamps LED type E27 - 1060 Lumen - 2700 Kelvin
- Max power : 12 W - Voltage : 230 V

- Material : Japanese paper, rattan wood, steel structure.

- Maintenance : Dust regulary with a feather duster or a microfiber.

NOTE: TO CHANGE THE BULB, HOLD THE FITTING WITH ONE HAND AND CHANGE THE BULB WITH THE OTHER HAND. BE CAREFUL THE BULB MAY BE HOT.

WARNING: NEVER LET THE LAMP LAYING FLAT ON THE GROUND, ALWAYS KEEP IT ON THE SIDE. IF POSSIBLE KEEP IT INSIDE THE PACKAGING UNTIL IT IS HANG IN PLACE.

INSTALLATION DU LUMINAIRE

1 - Fixer l'étrier et le support de coulistop au plafond à l'aide de trois vis taraudeuses $\varnothing$ 3 mm.

2 - Raccorder le domino à la sortie électrique du plafond. Si besoin ajuster la longueur de câble en jouant sur le serre-câble situé sous le boîtier. Visser le second coulistop dans son support.

3 - Ajuster les longueurs de câbles acier à l'aide des coulistops, puis fixer le boîtier à l'étrier en serrant les deux vis latérales.

4 - Faire le raccord électrique à l'intérieur de l'abat-jour, puis le suspendre en accrochant les mousquetons aux deux pièces en «T» de la structure.

LAMP SET UP

1 - Set the housing and the coulistop brackets to the ceiling with three $\varnothing$ 3 mm tapping screw.

2 - Connect the wire to the ceiling's electric socket. If necessary adjust the wire's length with the cable clamp under the housing. Screw the second coulistop into its bracket.

3 - Adjust the cables' lengths using the coulistops and screw the ceiling housing to its bracket by tightening the two lateral screws.

4 - Connect the wire inside the shade, then hang it in place by clicking the carabiners to the two «T» pieces of the structure.

